

Low Noise Type Cabinet Fan



Single Phase:

FV-12NS3 / FV-20NS3

FV-15NS3 / FV-23NL3


FV-18NS3 / FV-25NS3

FV-18NF3 / FV-25NF3

- Long life condenser motor with thermal cut-off
- Twin flow fan (sirocco fan)
- Fan casing with tapered scroll
- Embedded terminal box
- Noise absorption material adopted
- Compact size

Dimension

Unit : mm

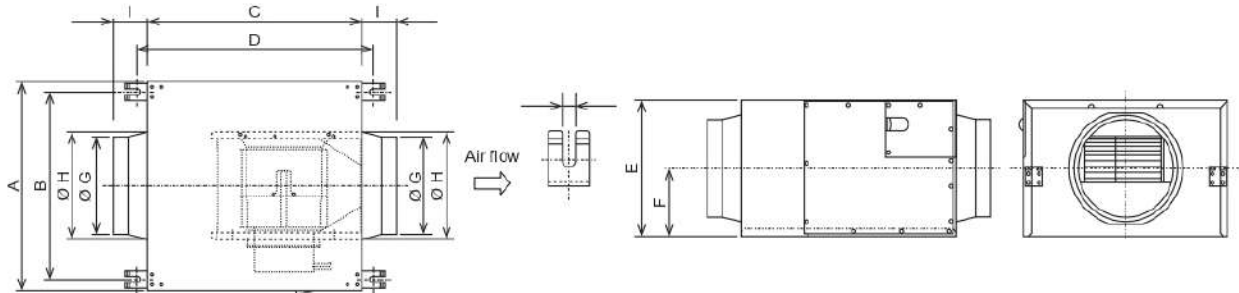

Model	A	B	C	D	E	F	G	H	I
FV-12NS3	290	250	291	335	184	92	97	112	51
FV-15NS3	290	250	302	346	206	103	145	163	60
FV-18NS3	316	276	338	382	232	116	145	163	60
FV-18NF3	376	336	397	441	254	127	195	211	70
FV-20NS3	416	376	441	485	272	136	195	211	70
FV-23NL3	468	424	469	513	298	149	195	211	70
FV-25NS3	494	450	505	549	334	167	240	255	85
FV-25NF3	494	450	505	549	334	167	240	255	85

Specification

Model	Phase	Voltage	Air Volume		Input (W)	Speed (rpm)	Noise (dB(A))	Weight (Kg.)	
			CMH	CFM					
FV-12NS3	Hi	1	220	180	106	18	1,265	21	5.5
	Lo			145	85	17	1,020	17	
FV-15NS3	Hi			340	200	33	1,270	25	6.5
	Lo			275	162	29.5	1,100	22	
FV-18NS3	Hi			500	294	60	1,250	29	8.5
	Lo			405	238	55	1,100	27	
FV-18NF3	Hi			770	453	91	1,190	31	10
	Lo			620	365	80	1,000	29	
FV-20NS3	Hi			920	541	120	1,195	32	14
	Lo			720	424	113	1,000	29	
FV-23NL3	Hi			1,200	706	230	1,245	40	18
	Lo			900	530	170	985	34	
FV-25NS3	Hi	1,700	1,001	345	1,125	41	24		
	Lo	1,380	812	265	950	38			
FV-25NF3	Hi	1,900	1,118	390	1,225	43	24		
	Lo	1,600	942	325	1,070	40			